


SELF ALIGNED ROTATOR

These rotators are designed and manufactured to suit need of rotating shells for circular seam welding. Precisely fabricated and machined structure along with perfectly aligned system ensures smooth rotation of the shells. There is no need to adjust the distance between the turning rolls as they adjust as per the diameter of the shell.

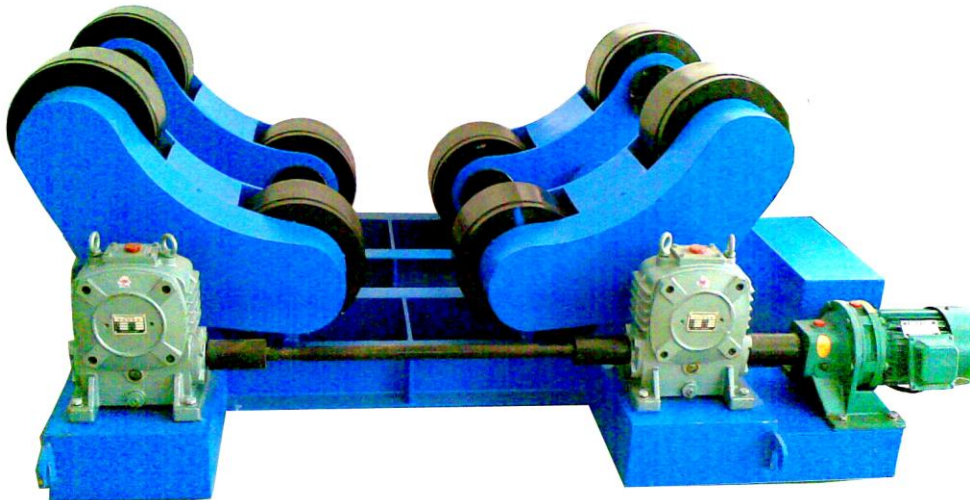

Features

Precisely machines base

High temperature rubber lining on the roller for perfect grip

Flanges on both sides of the wheel to protect the rubber lining

AC motor with VFD gives step less variation of speed over the entire range

MODEL	MOTOR POWER (Kw)	LOAD CAPACITY (T)	WHEEL DIA. (mm)	WORK PIECE DIA. (mm)	WHEEL WIDTH (mm)
ZT-5	0.75	5	250	250-2300	100
ZT-10	1.1	10	300	300-2800	120
ZT-20	1.5	20	300	500-3800	120
ZT-30	3.7	30	400	500-3800	150
ZT-50	5.0	50	400	600-4500	150
No.Of Wheels - 8					
Wheel Speed- 0.1-1.2 mtrs/min					
Input Power - 3 Phase 380-440Volts 50Hz Supply					
Wheel Material - Rubber / Polyurethane + C.I. Steel					

Specifications are subjected to change without notice